

Wireless HandsFree Emergency Telephone

Model: ETEM-27

GSM TELEPHONE
SOLAR POWERED



Both Handset type and hands free type available

Main Features:

1. Metal body, solid and temperature bearable.
2. Handset free, with or without keypad optional.
With 2 units of built in loudspeaker on the top.
3. With dual cards and dual standby function,
5 groups of speed call buttons.
Heavy duty vandal resistant buttons.

Sales and Service:



Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au

4. With wireless camera on the top to view the onsite environment via PC or mobile handset.
5. Lightning protection standard to ITU-T K21.
6. Waterproof grade about IP55.
7. Body with grounding connection protection.
8. Supports hotline call, self stops if the other side hangs up.
9. Built-in loud speaker, noise canceling microphone.
10. Lighting will flash when there is a incoming call.
11. AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional.
12. The design is super thin and smart. Embedded style and hanging style can be chosen.
13. Time out function optional.
14. Colours: RED + Stainless steel , If the qty is over 100 pcs it can be to the customers specification.

Applications:

As Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities....A good ideal telephone for use in wet or corrosive atmospheres.

Specification:

1. **Network Interface:** GSM Frequency : 850/900/1800/1900MHZ
2. **Ringing:** Through internal Speaker/ringer
3. **Power Supply:** Re-chargeable Battery powered: 9V/14Ah, Solar back-up: 12V/30W
4. **Time out:** selectable 0-20 minutes
5. **Temperature:** -20°C~ +60°C
6. **Relative Humidity:** up to 90%
7. **Built-in battery Standby:** 21days
8. **Built-in battery talking time:** 21 hours

1.5 Certification: N30788



EMC: EN50121 (Railway application- Electromagnetic Compatibility)

EN55022: emissions EN55024: immunity

Ingress Protection: GB4208-93 IP67

FCC ITU-T Recommendations K21

Telephone Unit size: 2500*310*255mm Unit Net weight: 90kg
1pcs in a wooden box CTN box, size: 2530X630X450cm G.W: 186kg
20GP: 88PCS 40GP: 176PCS 40HQ: 205PCS


Sales and Service:




Emergency Telephones

PO Box 606 Rockdale NSW 2216
Telephone: 02-9599-9555
Fax: 02-9599-9225
Email: sales@emergencytelephones.com.au
service@emergencytelephones.com.au

Telephone layout

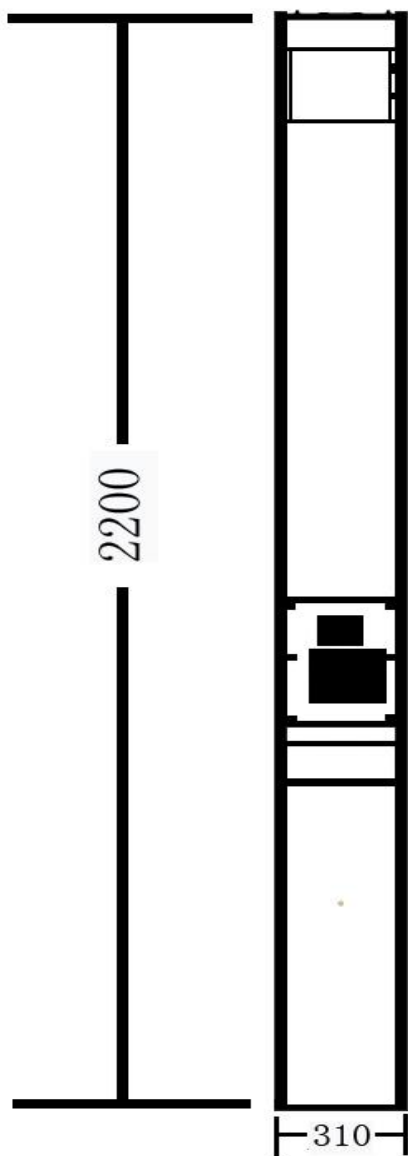

Front View

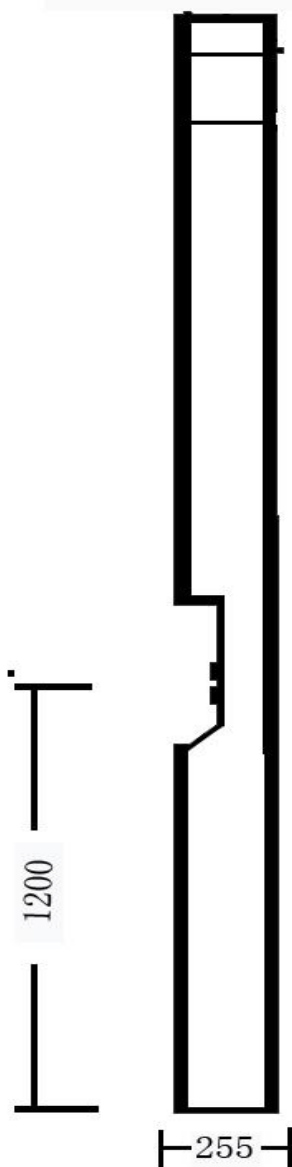

Side View



Rear View

Solar panel over 600mm high

Sales and Service:



Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au